





547583B

1	2	3
references : 4 3	1	C
2	3	0 2
3	4	0 4
		0 6
		1 0

1	2	3
2 = I - II	3 = 3 P	02 = 25 A
3 = I - 0 - II	4 = 4 P	04 = 40 A
		06 = 63 A
		10 = 100 A

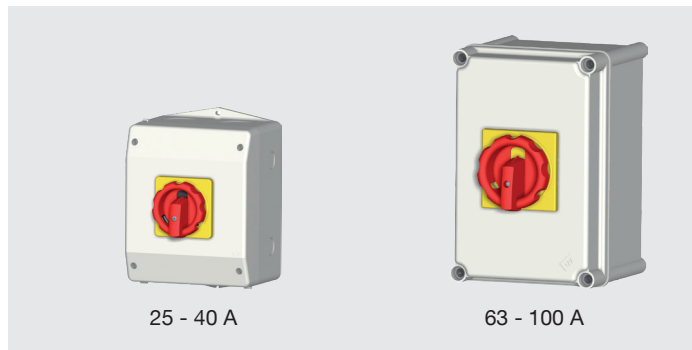


Ith (A)	Cu (mm²)	AWG Cu		(Nm/lbin)	mm / in
25	0.5 ... 4	14-12	PZ2	0.8-1.2 / 7.1 - 10.6	8 ⁺¹ ₋₂ / 0.31 ^{+0.04} _{-0.08}
40	1 ... 10	14-8	PZ2	1.2-1.5 / 10.6 - 13.3	10 ⁺¹ ₋₂ / 0.39 ^{+0.04} _{-0.08}
63	1.5 ... 16	14-4	FLAT 6.5 mm	2.5 / 22.1	13 ⁺² ₋₂ / 0.51 ^{+0.08} _{-0.08}
100	4 ... 35	10-2	PH1	1.5 / 13.3	13 ⁺² ₋₂ / 0.51 ^{+0.08} _{-0.08}

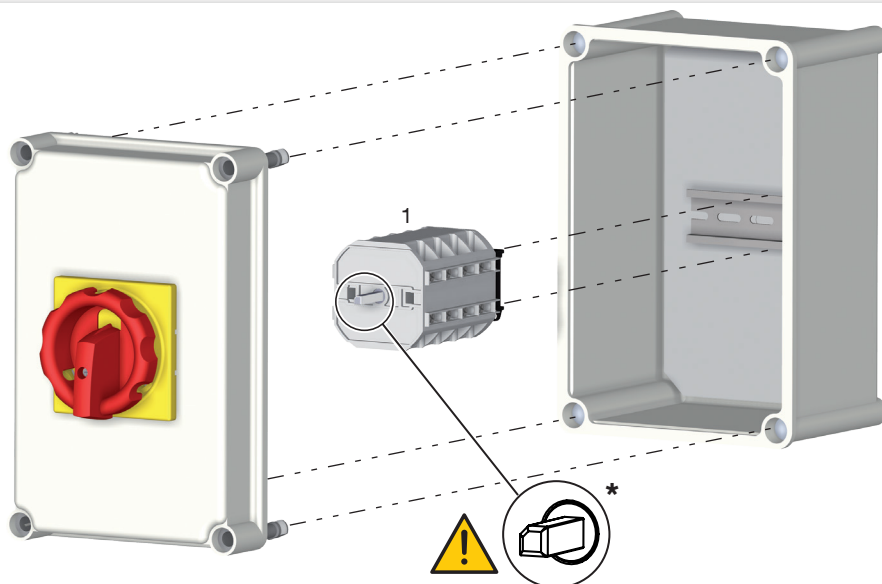




*

ref. : 4331xxxx




OR


ref. : 4321xxxx

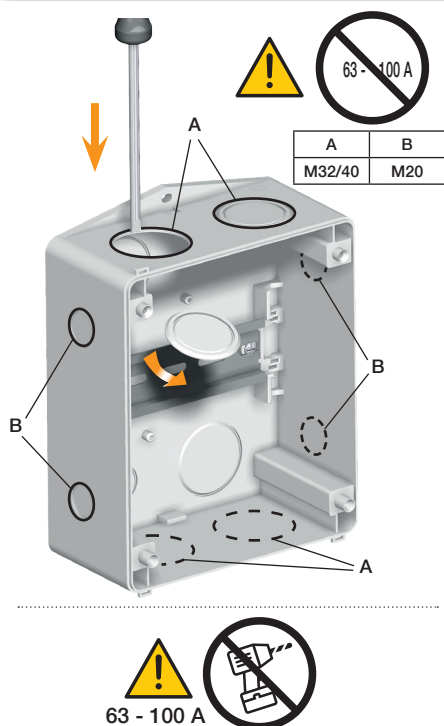




DIN IEC 60715
(1.37in / 35mm)

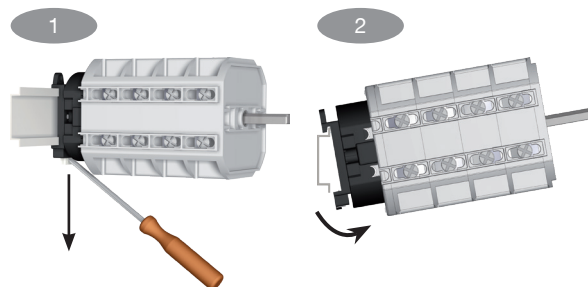

ref. : 4321xCxx

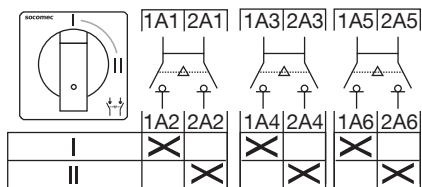

ref. : 4331xCxx

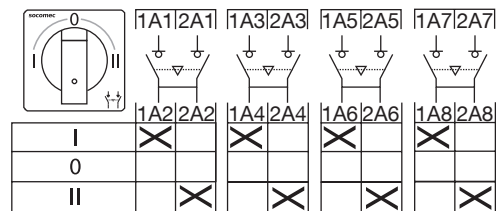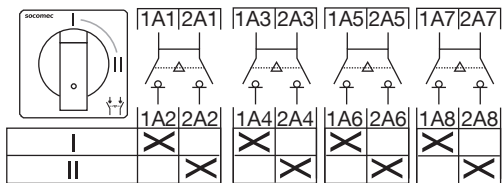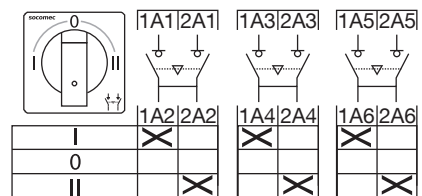

25 - 40 A



PZ2 ⊕



< 1.5 Nm / 13.3 lb.in

63 - 100 A



FLAT 6.5 mm ⊖

< 2.1 Nm / 13.3 lb.in

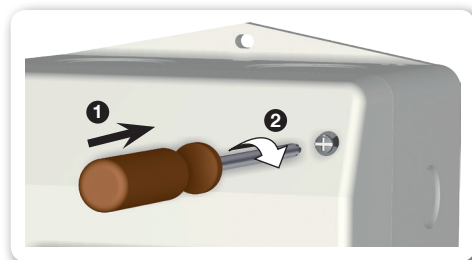

Ø = 0.35 / 9



- Hazardous voltage when padlocked in position I
- Tension dangereuse lorsque le produit est cadnassé en position I
- Tensión peligrosa cuando se bloquea en posición I
- Gefährliche Spannung, wenn mit Vorhängeschloss in Position I verriegelt
- Tensione pericolosa se lucchettato in posizione I
- Gevaarlijke spanning indien vergrendeld in positie I
- Niebezpieczne napięcie po zablokowaniu w położeniu I
- Tensão perigosa quando bloqueado na posição I
- 挂锁在位置I时的危险电压

in / mm

